


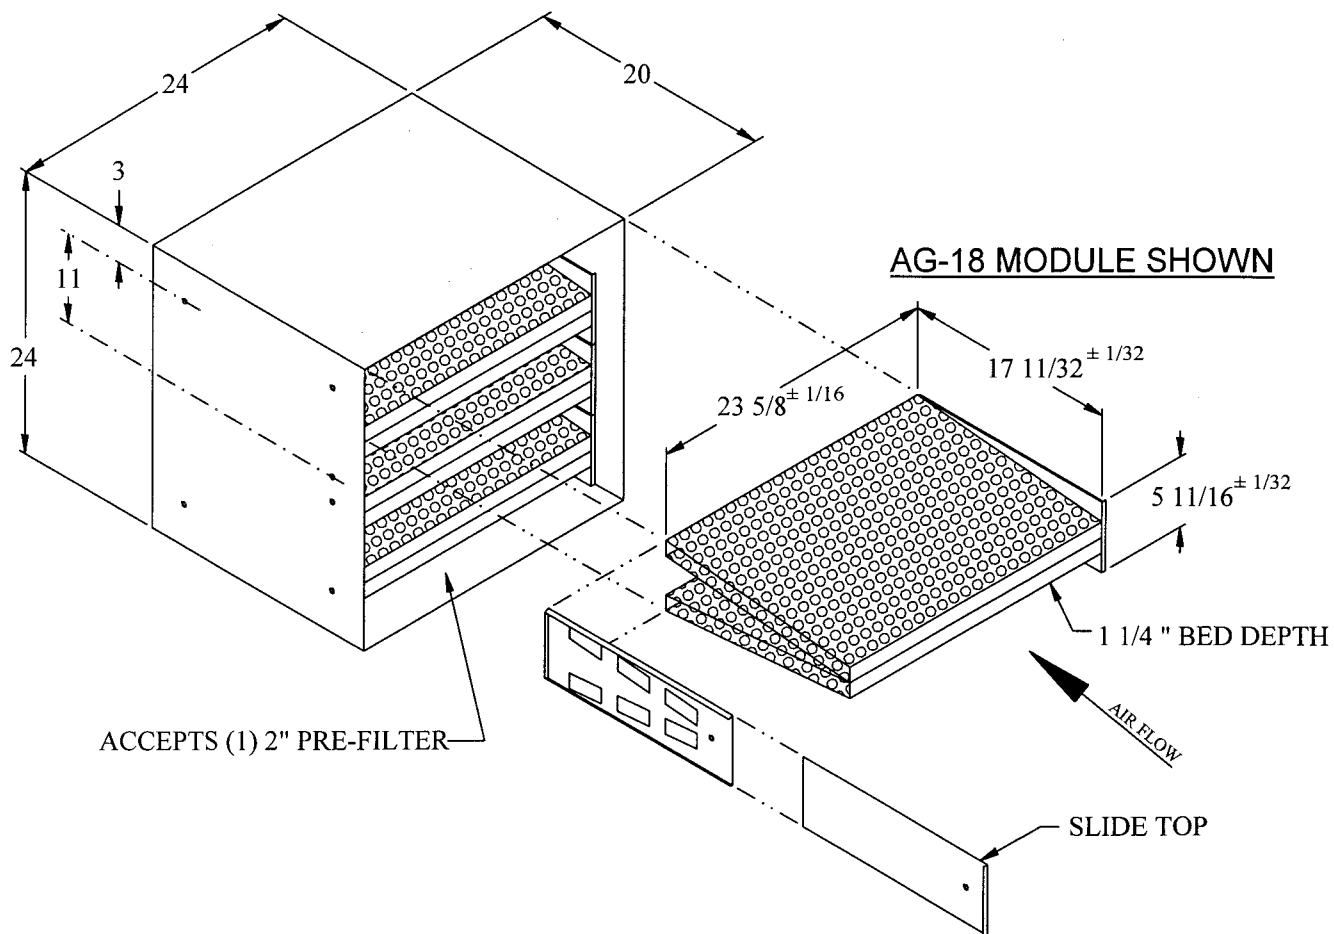

SPECIFICATIONS

RECOMMENDED AIR FLOW: 2000 CFM
0.45" W.G. RESISTANCE AT 500 FPM

THIS UNIT HOLDS:

72 LB COCONUT SHELL CARBON (60% ACTIVITY),
144 LB POTASSIUM PERMANGANATE OR
108 LB OF A 50/50 BLEND

CONSTRUCTION: 16 GA. COLD ROLLED STEEL,
BLACK POWDER COATED

UNIT USES AG-18 SERIES MODULES
(4) MODULES REQUIRED

WEIGHTS

UNIT WITHOUT MODULES:	43 LB
UNIT COMPLETE WITH EMPTY MODULES:	79 LB
UNIT COMPLETE WITH 60% ACTIVITY CARBON:	151 LB
UNIT COMPLETE WITH POTASSIUM PERMANGANATE:	233 LB
UNIT COMPLETE WITH 50/50 BLEND:	187 LB



ONE SOURCE
FOR
AIR FILTRATION
PRODUCTS

P.O. Box 32578
Louisville, KY 40232
P: 502-969-2304
F: 502-969-2759

CONTACT FACTORY TO
VERIFY REVISION LEVEL

TOLERANCES
UNLESS OTHERWISE SPECIFIED

FRACTIONAL
DECIMAL
ANGLES

ALL DIMENSIONS IN INCHES

DRAWING NAME

AG-22 FRONT ACCESS GRANULAR MEDIA HOUSING

APPROVED BY

H. Q. [Signature]

SPECIFICATION NO.

MKT-B-00334

PAGE

1 OF 1

SCALE

NONE

DWG. SIZE

A


REVISION

NEW

REVISION DATE

07-30-02

CONFIDENTIAL - DO NOT COPY. THIS MATERIAL IS TRADE SECRET AND PROPRIETARY BEING EXCLUSIVELY OWNED BY AIRGUARD. THE EXPRESSION OF THE INFORMATION CONTAINED HEREIN IS PROTECTED UNDER FEDERAL COPYRIGHT LAWS AND ALL COPYING IS PROHIBITED AND MAY BE SUBJECT TO CRIMINAL PENALTIES.

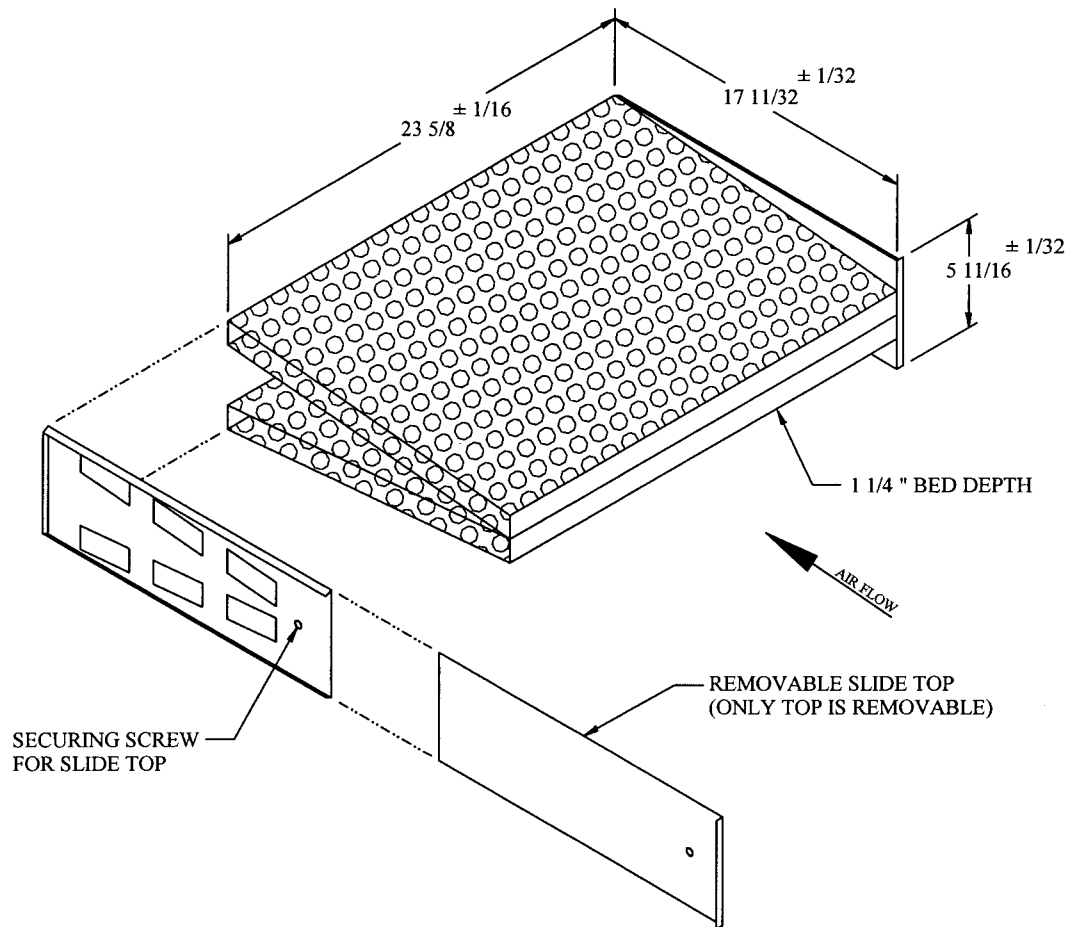

SPECIFICATIONS

(4) MODULES REQUIRED FOR AG-22 HOUSING

THIS MODULE HOLDS:
18 LB COCONUT SHELL CARBON (60% ACTIVITY),
36 LB POTASSIUM PERMANGANATE OR
27 LB OF A 50/50 BLEND

CONSTRUCTION:
16 GA. END PLATES AND SLIDE TOP
26 GA. PERFORATED STEEL SHEET
COLD ROLLED STEEL, BLACK POWDER COATED

OPTIONAL CONSTRUCTION:
26 GA. TYPE 304 STAINLESS STEEL

WEIGHTS

MODULE EMPTY:	9 LB
MODULE FILLED WITH 60% ACTIVITY CARBON:	27 LB
MODULE FILLED WITH POTASSIUM PERMANGANATE:	45 LB
MODULE FILLED WITH 50/50 BLEND:	26 LB

AIRGUARD
A HANSON COMPANY
ONE SOURCE
FOR
AIR FILTRATION
PRODUCTS
P.O. Box 32578
Louisville, KY 40232
P: 502-969-2304
F: 502-969-2759

CONTACT FACTORY TO
VERIFY REVISION LEVEL

TOLERANCES
UNLESS OTHERWISE SPECIFIED

FRACTIONAL
DECIMAL
ANGLES

ALL DIMENSIONS IN INCHES

DRAWING NAME

AG-18 TOP LOADING GRANULAR MEDIA MODULE

APPROVED BY

[Signature]

SPECIFICATION NO.

MKT-B-00335

PAGE

1 OF 1

SCALE

NONE

DWG. SIZE

A


REVISION

NEW

REVISION DATE

07-30-02

CONFIDENTIAL - DO NOT COPY. THIS MATERIAL IS TRADE SECRET AND PROPRIETARY BEING EXCLUSIVELY OWNED BY AIRGUARD. THE EXPRESSION OF THE INFORMATION CONTAINED HEREIN IS PROTECTED UNDER FEDERAL COPYRIGHT LAWS AND ALL COPYING IS PROHIBITED AND MAY BE SUBJECT TO CRIMINAL PENALTIES.

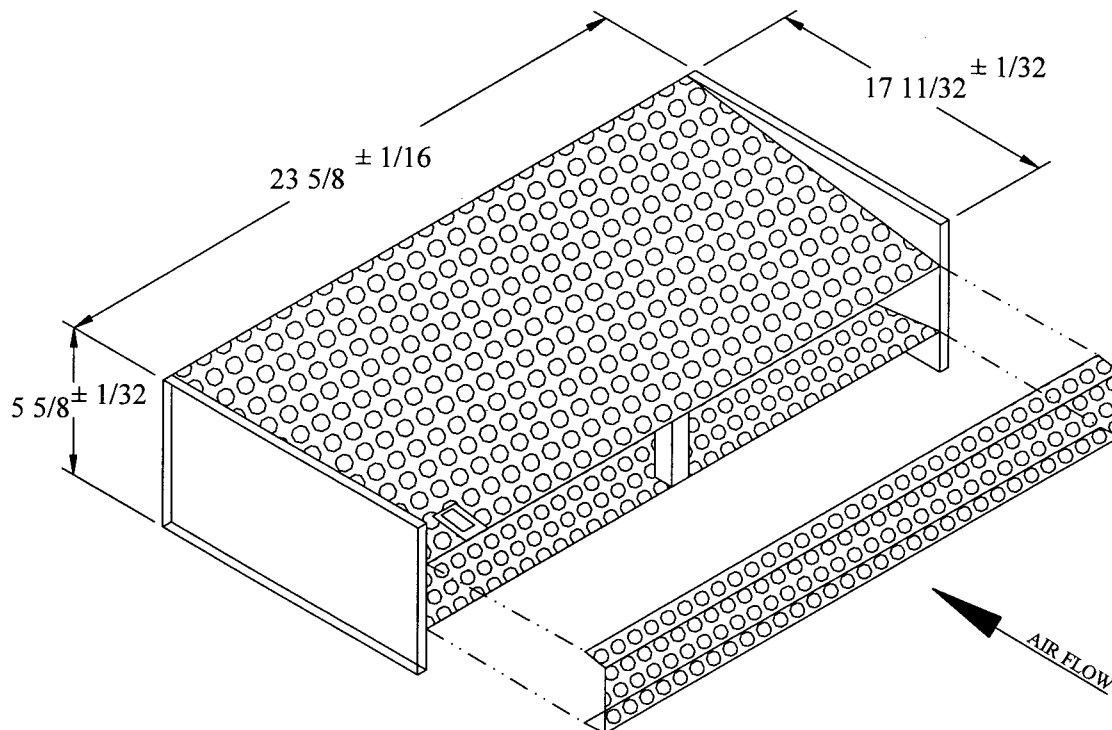

SPECIFICATIONS

(4) MODULES REQUIRED FOR AN AG-22 HOUSING

THIS MODULES HOLDS:

18 LB COCONUT SHELL CARBON (60% ACTIVITY),
36 LB POTASSIUM PERMANGANATE OR
27 LB OF A 50/50 BLEND

CONSTRUCTION:

16 GA. END PLATES
22 GA. PERFORATED STEEL SHEET
COLD ROLLED STEEL, BLACK POWDER COATED

OPTIONAL CONSTRUCTION:

TYPE 304 STAINLESS STEEL

WEIGHTS

MODULE EMPTY:

9 LB

MODULE FILLED WITH 60% ACTIVITY CARBON:

27 LB

MODULE FILLED WITH POTASSIUM PERMANGANATE:

45 LB

MODULE FILLED WITH 50/50 BLEND:

26 LB



ONE SOURCE
FOR
AIR FILTRATION
PRODUCTS

P.O. Box 32578
Louisville, KY 40232
P: 502-969-2304
F: 502-969-2759

CONTACT FACTORY TO
VERIFY REVISION LEVEL

TOLERANCES
UNLESS OTHERWISE SPECIFIED

FRACTIONAL
DECIMAL
ANGLES

ALL DIMENSIONS IN INCHES

DRAWING NAME

AG-18F TOP LOADING GRANULAR MEDIA MODULE

APPROVED BY

[Signature]

SPECIFICATION NO.

MKT-B-00336

PAGE

1 OF 1

SCALE

NONE

DWG. SIZE

A

REVISION

NEW

REVISION DATE

07-31-02

CONFIDENTIAL - DO NOT COPY. THIS MATERIAL IS TRADE SECRET AND PROPRIETARY BEING EXCLUSIVELY OWNED BY AIRGUARD. THE EXPRESSION OF THE INFORMATION CONTAINED HEREIN IS PROTECTED UNDER FEDERAL COPYRIGHT LAWS AND ALL COPYING IS PROHIBITED AND MAY BE SUBJECT TO CRIMINAL PENALTIES.