



Vari+Plus® VP

High Capacity Extended Surface Mini-Pleat Filters



Featuring:

Revolutionary,
Exclusive, DURA-TUFF™
Synthetic Media



- All Plastic Construction
- Highly Durable 100% Synthetic Media
- Fully Incinerable
- Moisture and Chemical Resistant
- Low Resistance

Vari+Plus® VP

High Capacity Extended Surface Mini-Pleat Filters



Product Information and Specifications

Three Efficiencies - MERV 15, MERV 14, MERV 13

All Plastic Construction - No metal components, moisture, corrosion and chemical resistant, light weight




Revolutionary Exclusive, Dura-Tuff™ Synthetic Media - Extremely durable. Resists tearing, abrasion. Damage resistant. High dust holding capacity.

Fully Incinerable - Enhances disposal options, assists with implementation of ISO 14001 Environmental Management System

Rigid Cell Design - Ideal for variable air volume systems, high air flow, turbulent conditions, repeated fan shutdown

Low Resistance - Energy efficient

Suitable for HVAC or Turbine Intake Applications

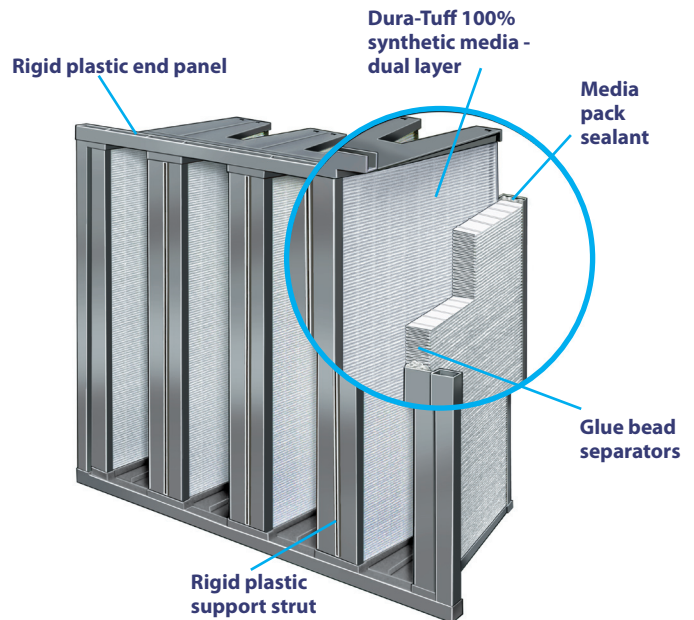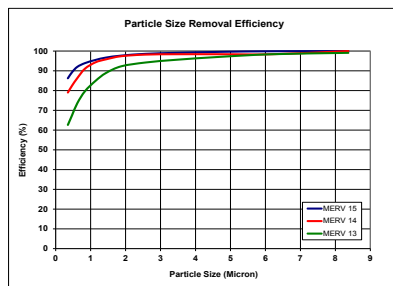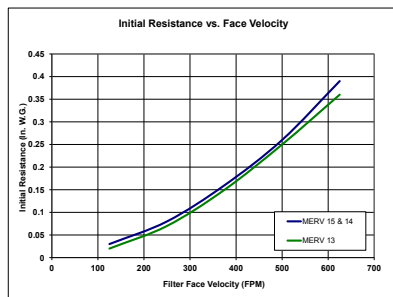

Product Information

Model Designation	Rated Average Efficiency	MERV Performance	Nominal Size (HxWxD)	Actual Size (HxWxD)	Rated Air Flow @500 FPM (CFM)	Rated Initial Resistance (In.W.G)	Recommended Final Resistance (In.W.G)
VPP-S-9504	90-95%	15	24 X 24 X 12	23-3/8 X 23-3/8 X 11-1/2	2000	.26"	1.5"
VPP-S-9515	90-95%	15	24 X 20 X 12	23-3/8 X 19-3/8 X 11-1/2	1650	.26"	1.5"
VPP-S-9503	90-95%	15	24 X 12 X 12	23-3/8 X 11-3/8 X 11-1/2	1000	.26"	1.5"
VPP-S-8504	80-85%	14	24 X 24 X 12	23-3/8 X 23-3/8 X 11-1/2	2000	.26"	1.5"
VPP-S-8515	80-85%	14	24 X 20 X 12	23-3/8 X 19-3/8 X 11-1/2	1650	.26"	1.5"
VPP-S-8503	80-85%	14	24 X 12 X 12	23-3/8 X 11-3/8 X 11-1/2	1000	.26"	1.5"
VPP-S-6504	60-65%	13	24 X 24 X 12	23-3/8 X 23-3/8 X 11-1/2	2000	.25"	1.5"
VPP-S-6515	60-65%	13	24 X 20 X 12	23-3/8 X 19-3/8 X 11-1/2	1650	.25"	1.5"
VPP-S-6503	60-65%	13	24 X 12 X 12	23-3/8 X 11-3/8 X 11-1/2	1000	.25"	1.5"

1. Performance data is per ASHRAE 52.2-2012 Test Method, based on a 24x24x12 filter size run at a test velocity of 492 FPM.

2. Width and height dimensions are interchangeable. Vari+Plus VP filters can be installed with the pleats either vertical or horizontal.

3. Continuous operating temperature: 180°F (82°C).

Underwriters Laboratories, Inc. Classification:

Vari+Plus VP filters are classified UL Standard 900 for flammability.

A-VPVP-1013



www.airguard.com



MADE IN THE
USA



Distributed by:

© 2013 CLARCOR Air Filtration Products.
CLARCOR Air Filtration Products has a policy of continuous product research and development and reserves the right to change design and specifications without notice. Terms and Conditions of Sale can be accessed in the "LOGIN" section at www.airguard.com



CLARCOR Air Filtration Products

100 River Ridge Circle • Jeffersonville, IN 47130

Customer Service: 1-866-247-4827 • Fax: 1-866-601-1809

Email: mailbag@airguard.com • www.airguard.com